




## FIG. 122

## ALL-THREADED ROD

[www.pipingtech.com/fig122](http://www.pipingtech.com/fig122)

- MATERIAL:** Carbon steel
- FINISH:** Black, painted, or hot dipped galvanized.
- SERVICE:** For use as support rods where a universal connection is required to allow piping movement.
- ORDERING:** Specify figure number, rod length and diameter, description and finish.



ROD SIZE A	MAX. RECOM. LOAD (lb.)		APPROX. WEIGHT (lb. per 100)
	@ 650 °F	@ 750 °F	
1/4	240	215	12
3/8	730	572	30
1/2	1,350	1,057	53
5/8	2,160	1,692	84
3/4	3,230	2,530	123
7/8	4,480	3,508	168
1	5,900	4,620	224

SCOMPONENTS04.XLS-09/02/11

## FIG. 126 & 127


## LINKED EYE ROD

[www.pipingtech.com/fig126-127](http://www.pipingtech.com/fig126-127)

- MATERIAL:** Carbon steel
- FINISH:** Black, painted, or hot dipped galvanized.
- SERVICE:** For use as support rods where a universal connection is required to allow piping movement.
- ORDERING:** Specify figure number, rod size and length, thread length and diameter and finish.

**FIG. 126 (WELDED)**

**FIG. 127**

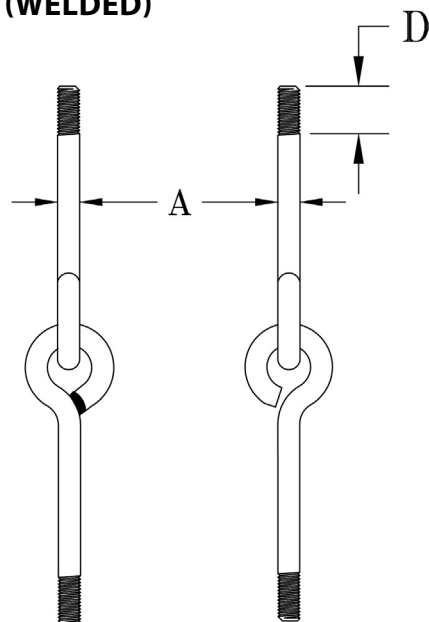

ROD SIZE A	THREAD LENGTH (in.) D	MAX. RECOM. LOAD	
		FIG. 126	FIG. 127
3/8	2 1/2	730	240
1/2	2 1/2	1,350	440
5/8	2 1/2	2,160	705
3/4	3	3,230	1,050
7/8	3 1/2	4,480	1,470
1	4	5,900	1,940
1 1/8	4 1/2	6,230	2,430
1 1/4	5	9,500	3,120
1 1/2	6	13,800	4,650
1 3/4	7	18,600	6,380
2	8	24,600	8,280
2 1/4	9	32,300	10,900
2 1/2	10	39,800	13,400

SCOMPONENTS04.XLS-07/01/09