


SPECIFICATIONS

INSULATION THK: _____
 SHOE LENGTH: _____
 LOADS, VERTICAL _____
 LATERAL _____
 AXIAL _____
 TEMPERATURE: _____

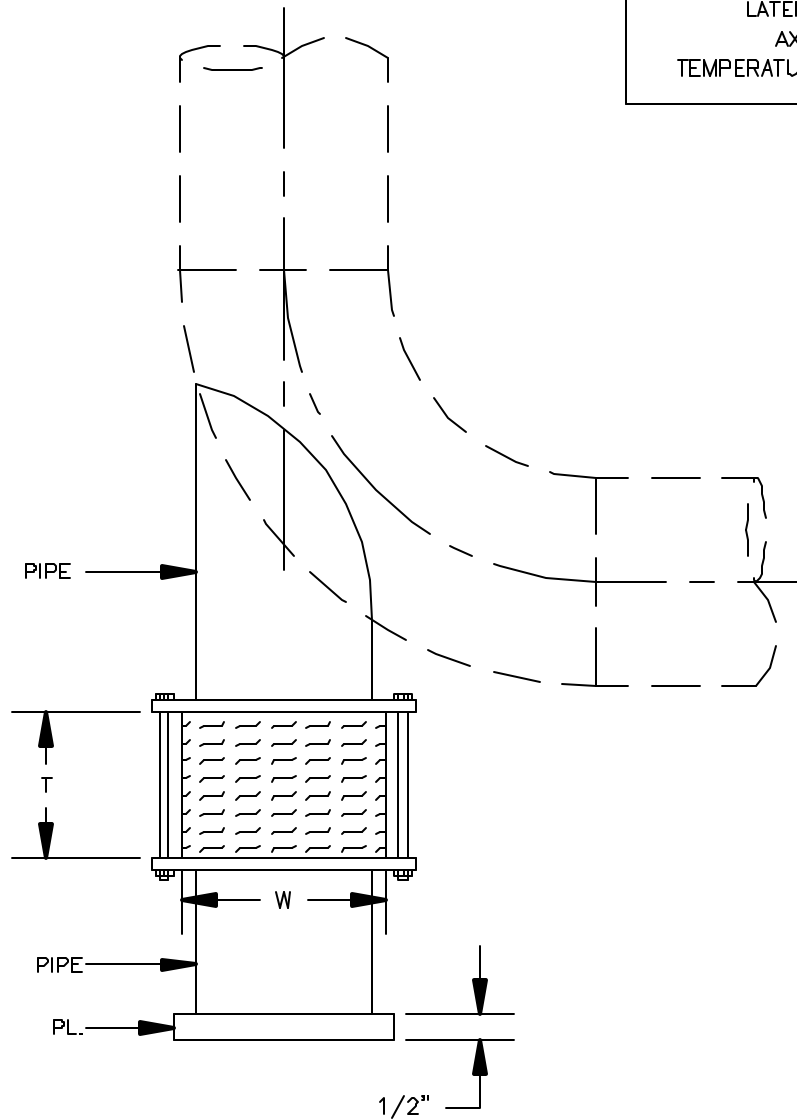

Design: PT&P 6/2/1999 2:01 PM HS-6030

NOTES

FIGURE#: HS-6030
 DESCRIPTION: MISCELLANEOUS SHOES, DUMMY LEG,
 HIGH DENSITY CALCIUM SILICATE

FUNCTION:	USE TO INSULATE DUMMY LEG FROM SURROUNDING CONDITIONS. - - - - -
PIPE SIZE:	1/2" TO 42" NPS.
MATERIAL:	HDG CARBON STEEL
INSULATION:	HIGH DENSITY CALCIUM SILICATE
TEMP. RANGE:	AMBIENT TO 1200°F
LAYERING SY.:	-
SHOE LTH,(L):	- -
TO ORDER:	SPECIFY PIPE SIZE, INSULATION THK., LENGTH HENCE. (HS-6030)-NPS-THK.-L
LOADS:	- -

CLIENT NAME: _____
 PROJECT NAME: _____
 REQUISITION#: _____
 P.O.#: _____
 DWG#: _____
 MARK#: _____
 PT&P JOB#: _____ ITEM#: _____
 DATE: _____

PIPING TECHNOLOGY & PRODUCTS, INC.

P.O. BOX 34506 HOUSTON TEXAS 77234
 3701 HOLMES RD. HOUSTON TEXAS 77051
 TELE#:(713)731-0030 FAX#.(713)731-8640
<http://www.pipingtech.com/> E-MAIL: info@pipingtech.com





Hotshoes ready for Shipment

Pipe size	Vertical Load(kips)	T	W
1-1/2"	4.32	1"	6"
2"	4.32	1"	6"
2-1/2"	4.32	1"	6"
3"	4.32	1"	6"
3-1/2"	5.88	1"	7"
4"	5.88	1"	7"
5"	9.72	1"	9"
6"	9.72	1"	9"
8"	12.00	2"	10"
10"	17.28	2"	12"
12"	23.52	2"	14"
14"	30.72	2"	16"
16"	38.88	3"	18"
18"	48.00	3"	20"
20"	58.08	3"	22"
24"	81.12	3"	26"